


Body Construction	Extruded aluminium - either anodized or powder coated
Lens and Reflector type	190 degree ultra wide distribution Opal lens with 80% transmission.
Lumen options/Watts Length options	600mm - 24W 3072 lumens at source 1200mm - 48W 6144 lumens at source 1800mm - 72W 9216 lumen as source
Supply Voltage	230V AC 50HZ
CCT options	4000K and 5000K 3000K - (reduce lumens by 8%)
CRI	Plus 80 minimum - plus 90 possible on request
IP Rating	IP 44 - splash proof IP 55 on reuest
Control Gear	50000 hour Tridonic or Helvar or TCI - internally mounted
Installation Data	IES Files - Yes
Dimmable?	Standard - no but with correct gear - then; Dali - Yes 1-10V - Yes DMX - Yes Triac -Yes

Lumen values are as measured at source - on the PCB - not exiting light fitting.
Values are subject to change at any time and without notice.



Surface mount option

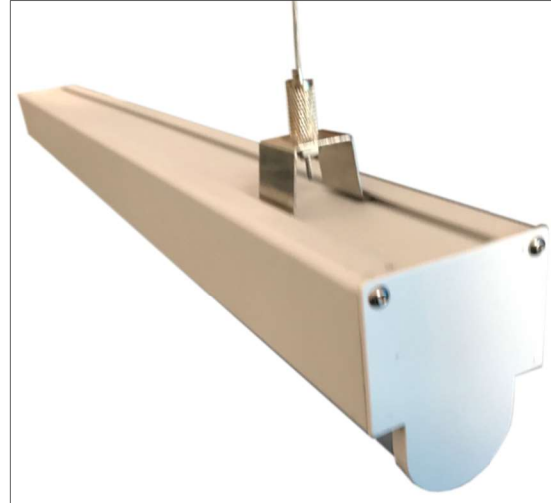

Pendant option

