



IP 20

I-Tube

LED Commercial Lighting - Indirect Tube Lighting

Visually Comfortable Indirect Reflection

- Easy replace & Install
- Glare-free & High efficient light
- Optimal uniformity

Application

- Home, Office, Factory, Super store, Big box chain, Office, Gym

Specification


*Tolerance : ± 5%

Model	Power	* Luminous Efficacy	* Luminous Flux	Color Temperature	CRI	Weight	Life Time	Input Voltage	Operation Temperature
IT16	16W	105 lm/W	1,680 lm	3000K, 4000K 5000K, 5700K 6500K	80 Ra	AC : 0.44kg / 0.971 lb G13 : 0.36kg / 0.8 lb	50,000hrs	AC220~240V AC100~277V AC100~240V	-10°C~50°C 14°F ~ 122°F


Body	Aluminum 0.3T	Mounting Option	G13 Pin, Surface Mount
Cover	PolyCarbonate 1T (Clear)	Light Distribution	110° (Symmetric)

Dimension


- Basic (G13 Pin)



- Surface Mount

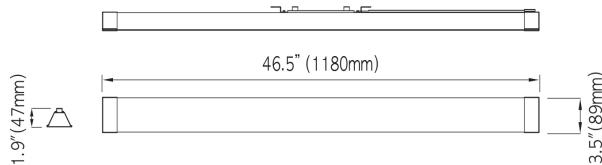

Photometry

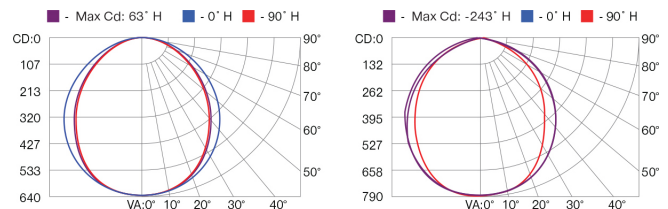

[IT16 / 5000K / 110°]

[IT19 / 5000K / 110°]



The above specifications are based on August 2014 / It may be altered without notice.