


## T-Top LED Flood Lighting


### Product Features

	1200W	1000W	800W	600W	400W	300W	200W
LED Luminous Efficiency:	160-180lm/W	160-180lm/W	160-180lm/W	160-180lm/W	160-180lm/W	160-180lm/W	160-180lm/W
Model :	SLI2SD-T	SLI0SD-T	SL8SD-T	SL6SD-T	SL4SD-T	SL3SD-T	SL2SD-T
Energy Used:	1200W	1000W	800W	600W	400W	300W	200W
Lifespan:	50,000 Hours	50,000	50,000	50,000	50,000	50,000	50,000
Material Quality:	Al+PC	Al+PC	Al+PC	Al+PC	Al+PC	Al+PC	Al+PC
Input Voltage:	90-305Vac 50/60Hz	90-305Vac 50/60Hz	90-305Vac 50/60Hz	90-305Vac 50/60Hz	90-305Vac 50/60Hz	90-305Vac 50/60Hz	90-305Vac 50/60Hz
Power Factor(PF):	>0.95	>0.95	>0.95	>0.95	>0.95	>0.95	>0.95
Driver:	MEANWELL HLG	MEANWELL HLG	MEANWELL HLG	MEANWELL HLG	MEANWELL HLG	MEANWELL HLG	MEANWELL HLG
Light Source:	SMD3030- 1344PCS	SMD3030- 1120PCS	SMD3030- 896PCS	SMD3030- 672PCS	SMD3030	SMD3030- 336PCS	SMD3030- 224PCS
CCT:	2700-6500K	2700-6500K	2700-6500K	2700-6500K	2700-6500K	2700-6500K	2700-6500K
Luminous Flux (lm):	151200lm (5700K)	126000lm (5700K)	100800lm (5700K)	75600lm (5700K)	50400lm (5700K)	37800lm (5700K)	25200lm (5700K)
Luminous Efficiency:	126lm/W	126lm/W	126lm/W	126lm/W	126lm/W	126lm/W	126lm/W
Ra:	>80	>80	>80	>80	>80	>80	>80
Beam Angle:	25°/45°/60°/ 90°/120°	25°/45°/60°/ 90°/120°	25°/45°/60°/ 90°/120°	25°/45°/60°/ 90°/120°	25°/45°/60°/ 90°/120°	25°/45°/60°/ 90°/120°	25°/45°/60°/ 90°/120°
Ingress Protection:	IP67	IP67	IP67	IP67	IP67	IP65	IP65
Operating Temperature:	-30°C~50°C	-30°C~50°C	-30°C~50°C	-30°C~50°C	-30°C~50°C	-30°C~50°C	-30°C~50°C
Operating Humidity:	10% ~80%	10% ~80%	10% ~80%	10% ~80%	10% ~80%	10% ~80%	10% ~80%
Warranty:	5 Years	5 Years	5 Years	5 Years	5 Years	5 Years	5 Years
Nett Weight:	33kg	29kg	23kg	16.8kg	13.82kg	8.24kg	6.14kg

## Product Dimensions

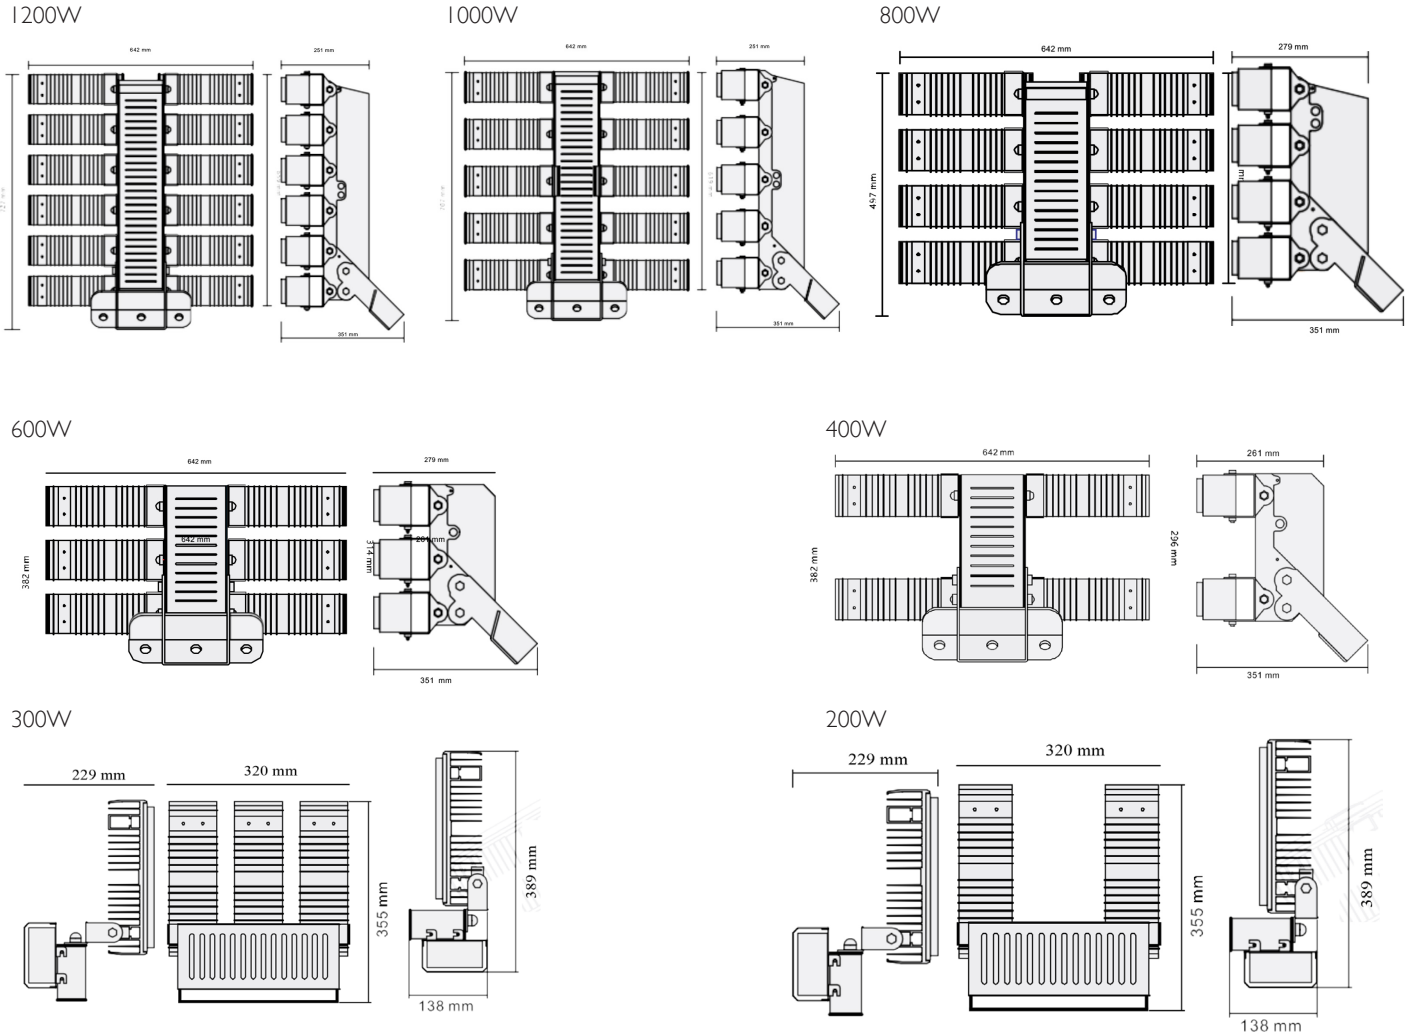

## Photometry

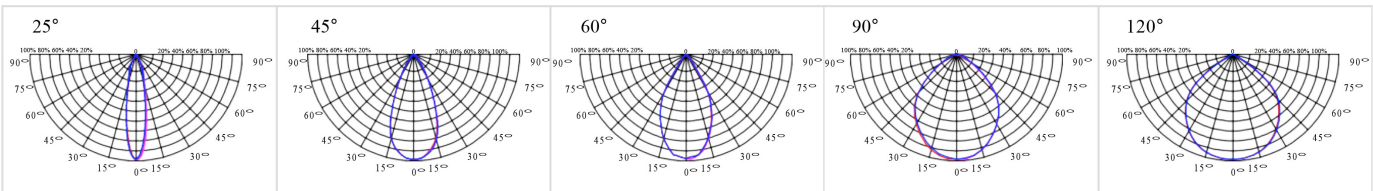

**EPIC LIGHTING**

PO Box 50940, Wierda Park, 0149286  
 Research Rd, Unit 4, Pretoria West  
 087 711 0267 | info@epiclighting.co.za



[www.epiclighting.co.za](http://www.epiclighting.co.za)